



2018 model shown. Vehicle shown with upfits from an independent supplier and are not covered by the GM New Vehicle Limited Warranty. GM is not responsible for the safety and quality of independent supplier alterations.

2019

SCHOOL BUS/SHUTTLE BUS APPLICATIONS

UPFIT

FLEET MANAGEMENT

Body-on-frame (BOF) design provides a foundation for upfit integration

177-IN.

FLEET MANAGEMENT

Three wheelbase options, including a new 177-inch School Bus Option on 4500 models

4.3L V6


DRIVER PRODUCTIVITY

Standard 4.3L V6 engine helps provide the performance needed for highway driving or frequent starts/stops

AVAILABLE MODELS

3500 - 139-inch wheelbase	1WT
3500 - 159-inch wheelbase	1WT
4500 - 159-inch wheelbase	2WT
4500 - 177-inch wheelbase	2WT

EXTERIOR COLORS

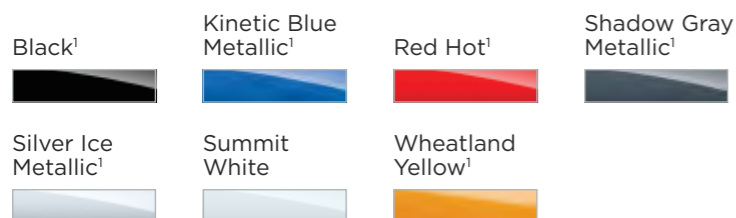

KEY STANDARD FEATURES

Features based on Express/Savana Cutaway 1WT (3500) and 2WT (4500) unless otherwise noted.

SAFETY + SECURITY

Rear Vision Camera Prep (10,000-lb. GVWR³ and under)
StabiliTrak[®] Electronic Stability Control System

PERFORMANCE

4.3L V6 engine (276 hp/298 lb.-ft.) (139-inch wheelbase model only)

6.0L V8 engine (341 hp/373 lb.-ft.) (standard on 159- and 177-inch wheelbase models; available on 139-inch wheelbase model)

4-wheel antilock disc brakes

Hill Start Assist

PRODUCTIVITY + DRIVE EXPERIENCE

110-volt outlet

Daytime Running Lamps

Driver Information Center

Driver-only high-back bucket seating

Single-zone manual climate control

KEY AVAILABLE FEATURES

Optional features and packages vary by trim level. See Order Guide for details.

Dual rear wheels

Locking rear differential

Remote Keyless Entry (Shuttle Bus only)

Remote Start (Shuttle Bus only)

SCHOOL BUS CHASSIS PACKAGE (B3D)

33-gallon side-mount fuel tank

220-amp alternator

Auxiliary rear heat provisions

Brake warning indicator

Dual batteries: 770 cold-cranking amp primary and isolated heavy-duty 770 cold-cranking amp (late availability)

Outside mirror delete

Stop/turn signal circuits (allow the stop and turn signals to be operated separately)

Wiring junction block accessory with (2) 30-amp circuits

SHUTTLE BUS CHASSIS PACKAGE (ANC)

220-amp alternator

Auxiliary rear heat provisions

Chrome Appearance Package

Cruise control

Dual batteries: 770 cold-cranking amp primary and isolated heavy-duty 770 cold-cranking amp (late availability)

Soft-mount donut and bolt

Stop/turn signal circuits (allow the stop and turn signals to be operated separately)

Wiring junction block accessory with two 30-amp circuits

NOTE: Read the vehicle's Owner's Manual for important safety and driver assistance feature limitations and information.

	3500 (139-inch WB)	3500 (159-inch WB)	4500 (159-inch WB)	4500 (177-inch WB)
Powertrain/Mechanical				
Engine	4.3L V6 (std.) 6.0L V8 (opt.)	6.0L V8	6.0L V8	6.0L V8
Transmission	8-speed (std.) 6-speed (opt.)	6-speed	6-speed	6-speed
Frame yield strength (psi)	33,000	33,000	33,000	33,000
GVWR ³ options (lbs.)	9,900-12,300	12,300	14,200	14,200
Max. payload ⁴ (lbs.)	7,496	7,284	9,006	8,838
Max. fuel tank capacity (gal.)	33	33/57	33/57	33/57
Wheels	SRW/DRW	DRW	DRW	DRW
Exterior Dimensions				
Length (in.)	246.7	266.7	266.7	284.8
Height (in.)	82.9	82.9	82.9	82.9
Body Width (without mirrors) (in.)	79.2	79.2	79.2	79.2
Cab-to-axle (in.)	80	100	100	118
Cab to end of frame (in.)	148.5	168.5	168.5	186.5
Ground clearance (front/rear) (in.)	7.6/6.8	7.6/7.0	7.6/7.0	7.6/7.0

¹ Premium paint; additional charge. ² SEO solid paint color. ³ Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ⁴ These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's door jamb.